

## CATALOLGUE

<b>1 Welcome.....</b>	<b>5</b>
<b>2 Features and main function.....</b>	<b>6</b>
<b>3 Appearance phone and keypad.....</b>	<b>7</b>
3.1 Appearance phone and keypad note.....	7
3.2 Function key.....	7
3.3 Dialing key.....	7
3.4 End key.....	7
3.5 Direction key.....	8
3.6 Number key.....	8
3.7 1key.....	8
3.8 0 key.....	8
3.9 *key.....	8
3.10#key.....	8
3.11 Left side keypad.....	9
3.12 Camera key.....	9
<b>4Message symbol.....</b>	<b>9</b>
4.1 Display screen.....	9
4.2 Display state icon.....	9
4.3 Selection note.....	10
<b>5 Function menu.....</b>	<b>10</b>
<b>6 Use guide.....</b>	<b>13</b>
6.1 install SIM card.....	13
6.2 Remove SIM card.....	13
6.3 install battery .....	13
6.4 Remove battery.....	14
6.5 Charge the battery.....	14
6.6 Power on/off.....	15
6.7 install flash memory .....	16
<b>7 Make a call/ answer call.....</b>	<b>16</b>
7.1 Make a mall .....	17
7.2 SOS call.....	17
7.3 Dialing international call.....	17
7.4Answer call .....	18
7.5 Adjust volume.....	18
7.6 Calling option.....	18
7.7 Release call.....	18
7.8Missed call.....	18
<b>8 Phone BOOK.....</b>	<b>19</b>
8.1 Brose phone book.....	18
8.2 Add new entry.....	19
8.3 Copy all.....	19
8.4 Delete.....	20

8.5 Caller group.....	20
8.6 Extra number.....	21
8.7 Settings.....	21
<b>9 Messages.....</b>	<b>21</b>
9.1 Write Message.....	22
9.2 inbox.....	23
9.3 Outbox.....	26
9.4 Everyday expression.....	26
9.5 Message setting.....	26
9.6 MMS.....	27
9.7 Voice inbox.....	30
9.8 Broadcast message.....	30
<b>10 Call History.....</b>	<b>30</b>
10.1 Missed calls.....	31
10.2 Dialed calls.....	32
10.3 Received calls.....	32
10.4 Delete call log.....	32
10.5 Call time.....	32
10.6 Call costs.....	33
10.7 SMS counter.....	33
10.8 GPRS counter.....	33
<b>11 Settings.....</b>	<b>33</b>
11.1 User profiles.....	34
11.2 Phone setup.....	36
11.3 Call setup.....	39
11.4 Network setup.....	39
11.5 Security setup.....	40
11.6 Recovering factory settings.....	42
11.6 Sound effect.....	42
<b>12 Multimedia.....</b>	<b>42</b>
12.1 Camera.....	43
12.2 Image viewer.....	44
12.3 Video recorder.....	44
12.4 Video player.....	45
12.5 Audio player.....	46
12.6 Sound recording.....	47
12.7 Melody Compose.....	48
<b>13 File manager.....</b>	<b>50</b>
<b>14 Fun &amp; Games.....</b>	<b>50</b>
14.1 Games.....	50
14.2 Themes.....	51
14.3 GAME SETTING.....	51
<b>15 Organize.....</b>	<b>51</b>

15.1 Calculator.....	54
15.2 Unit converts.....	54
15.3 Calendar.....	54
15.4 Memo.....	54
15.5 Alarm.....	55
15.6 World Clock.....	56
<b>16 Service.....</b>	<b>56</b>
<b>17 Quick button function.....</b>	<b>58</b>
<b>18 Input method.....</b>	<b>58</b>
18.1 input key.....	58
<b>19 Safe passwords.....</b>	<b>59</b>
19.1 The code of PIN.....	59
19.2 The code of PUK.....	60
19.3 The code of PIN2.....	60
19.4 The code of PUK2.....	60
<b>20 Maintenance and settle problem.....</b>	<b>61</b>
20.1 Care and maintenance.....	61
20.2 The maintenance of batteries.....	62
20.3 help.....	63

## 1 Welcome

Thank you for your selecting our company MP4 camera mobile phone, humanity design ,mini camera function, convenient shortcut operation ,you must reel satisfactory when use it.

The user guide letters are concise, easy to read relax. Read these simple guidelines. Not following them may be dangerous or ill legal. Read the complete user guide for further information.

### **ROAD SAFETY COMES FIRST**

Obey all local laws. Always keep your hands free to operate the vehicle while driving. You first consideration while driving should be safety.

### **SWITCH ON SAFELY**

Do not switch the phone on when wireless phone use is prohibited or when it may cause intervene or danger.

### **SWITCH OFF IN HOSPITALS**

Follow any restrictions. Switch the phone off near medical equipment.

### **SWITCH OFF IN AIRCRAFT**

Follow any restrictions. Wireless devices can cause interference in aircraft

### **SWITCH OFF WHEN REFUELLING**

Don't use the device at a refueling point. Don't use near fuel or chemicals.

### **SWITCH OFF NEAR BLASTING**

Follow any restrictions. Don't use the device where blasting is in progress.

**QUALIFIED SERVICE**

Only qualified personnel may install or repair this product .

**BACK-UP COPIES**

Remember to make back-up copies or keep a written record of all important information stored in your phone .

**ENHANCEMENTS AND BATTERIES**

Use only approved enhancements and batteries , Do not connect incompatible products .

**CONNECTING TO OTHER DEVICES**

When connecting to any other device , read its user guide for detailed safety instructions . Do not connect incompatible products .

**CHILDREN SATETY**

Phone and fittings should not be took by children .

**2. Feature and main function**

- Camera function
- Phone film
- MP3 play function
- MP4 function
- Record function
- Electron move hard disk
- Color display screen
- Classical music ring
- Harmonious chord music
- Release call function
- Support TF card
  
- Missed call , incoming call , remove automatic memory code and time
- Display screen picture setting
- Calculator , game , calendar , alarm clock
  
- Look through phone directory , quickly look through numbers
  
- Call volume , ringing setting

- Profiles mode option
- Language option , entry Chinese/English
- Turn on/off music setting
- Turn on/off power setting on time
- Phone lock

### **3. Appearance and keypad**

#### **3.1 Appearance and keypad note**

##### **3.2 Function key**

- Left/right function key perform part left below letter or symbol function
- In standby mode , press left function key enter function form option , press right function key entry trends selection .

##### **3.3 Dialing key**

- Answer call
- Entry Phone number , press the key make a call , also dial number in the phone directory and call register
- In standby mode , show recent dialed number .

##### **3.4 End key**

- Switch on/off
- End call
- Exit some function , return to waiting phone state

##### **3.5 Direction key**

- Stands for  $\Delta \nabla$  four directions
- Move floating mark and select setting and options
- Press  $\Delta$  to enter media Player directly during " stand by " .
- Press  $\nabla$  to enter Phone List directly during " stand by " .

##### **3.6 Numbers key**

- Dial number , press different key show different number
- In English and number entering state , according different entering way , show different

symbol . Such as letter or number .

### 3.7 1 key

- Show number 1 when dialing .

### 3.8 0 key

- Show number 0 when dialing , long time press , will show +
- Long time press , will show + , then press p , equal to pause function

### 3.9 \*key

- When dialing number , will show \*
- Letters and English entering state , show punctuation symbol .

### 3.10 # key

- When dialing number , will show #
- In standby mode , press the key show state mode/common mode transfer
- Select entering mode , such as English entry .

### 3.11 left side keypad $\Delta \nabla$

- Calling state , adjust volume
- Waiting state , adjust keypad volume
- Incoming ring , entry silence mode
- Select numbers in phone directory

### 3.12 Camera key

- In standby mode , press the camera key , entry camera gain scenery .

**Remark:** screen waiting state is that mobile find service network , not going on any operation .

## 4. Message symbol

### Display Screen

Main display screen show the contents including three parts .

- On the top line stand for state icon , express receive the strength signal and the balance state of the battery .
- Middle part stand fox text and picture selection , including numbers , date , time , letter , and dynamic icon .
- The bottom line stand for left/right function key .

#### 4.2 Display screen state icon



The signal strength of the network



Received a message



Calls to be diverted to another number



Active alarm clock



Ringing state



The battery charge level



GPRS function is active



Vibration/Ringing state



Line 1/ Line 2

#### 4.3 Selection note

The phone have some function menu which has simple selection not .


Show the Function is active    show the function turn off , " √ " show select the function


Press the left function key practice the function is on/off .

#### 5. Function menu

<p>▶ Phone book</p>	<p>Quick Search Search Entry Add New Entry Copy All Delete Caller Group</p>	<p>Owner Number SOS Number</p>	<p>Memory search Preferred Storage</p>
<p>2007-3-31</p>	<p>VEPTU – Luxury Mobile Phones</p>		<p>P7 of 36</p>



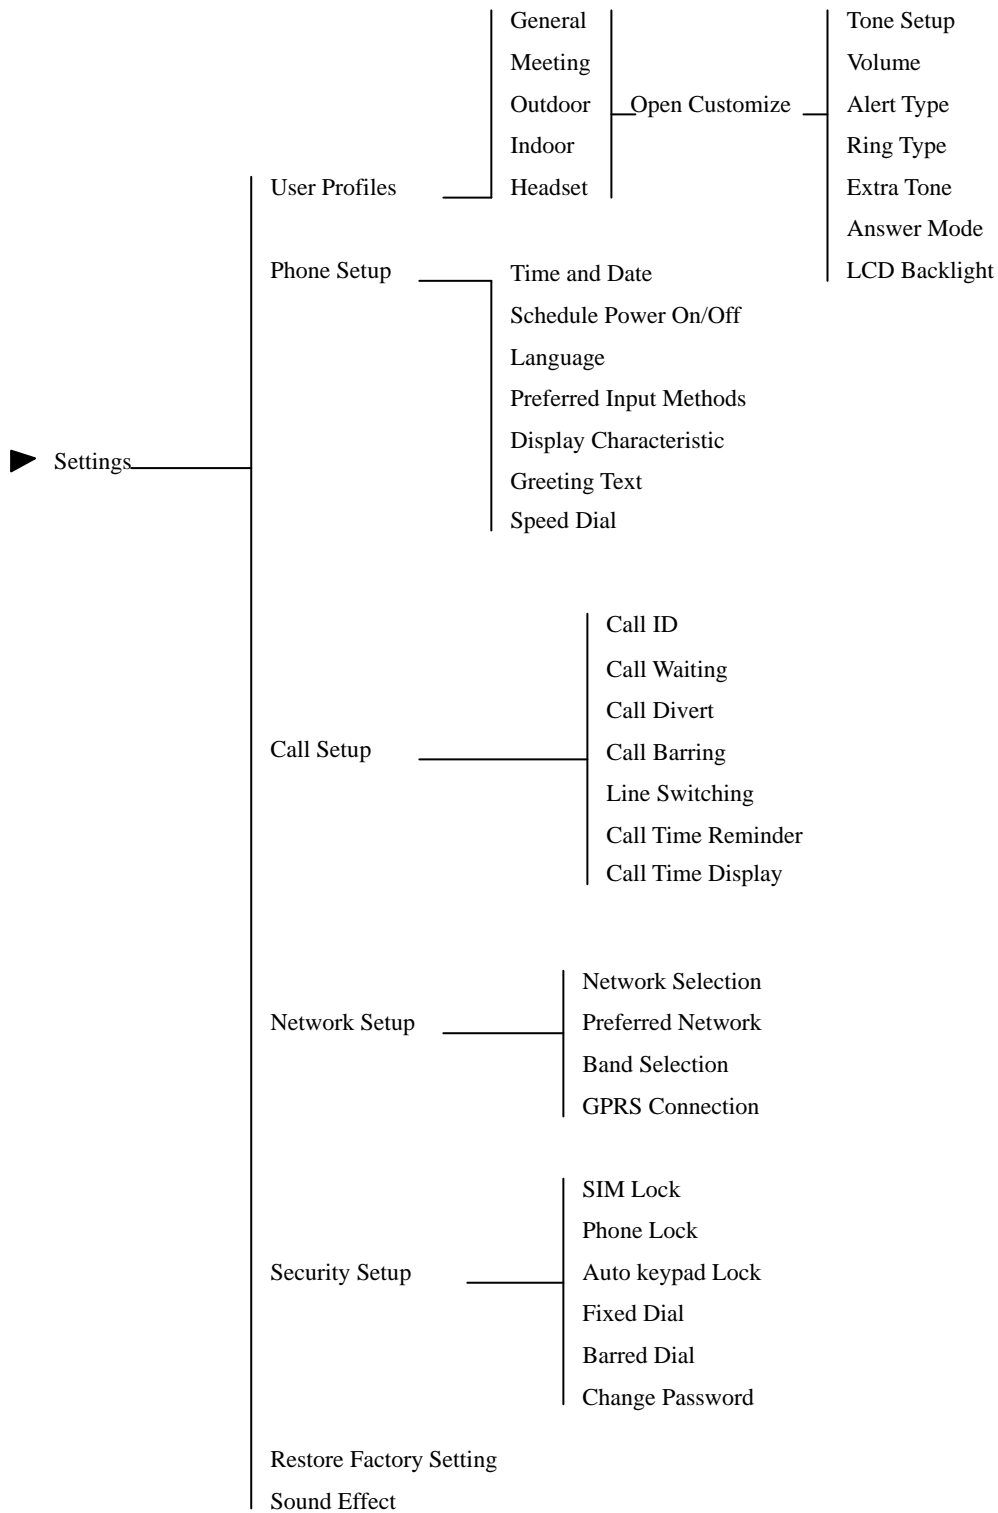

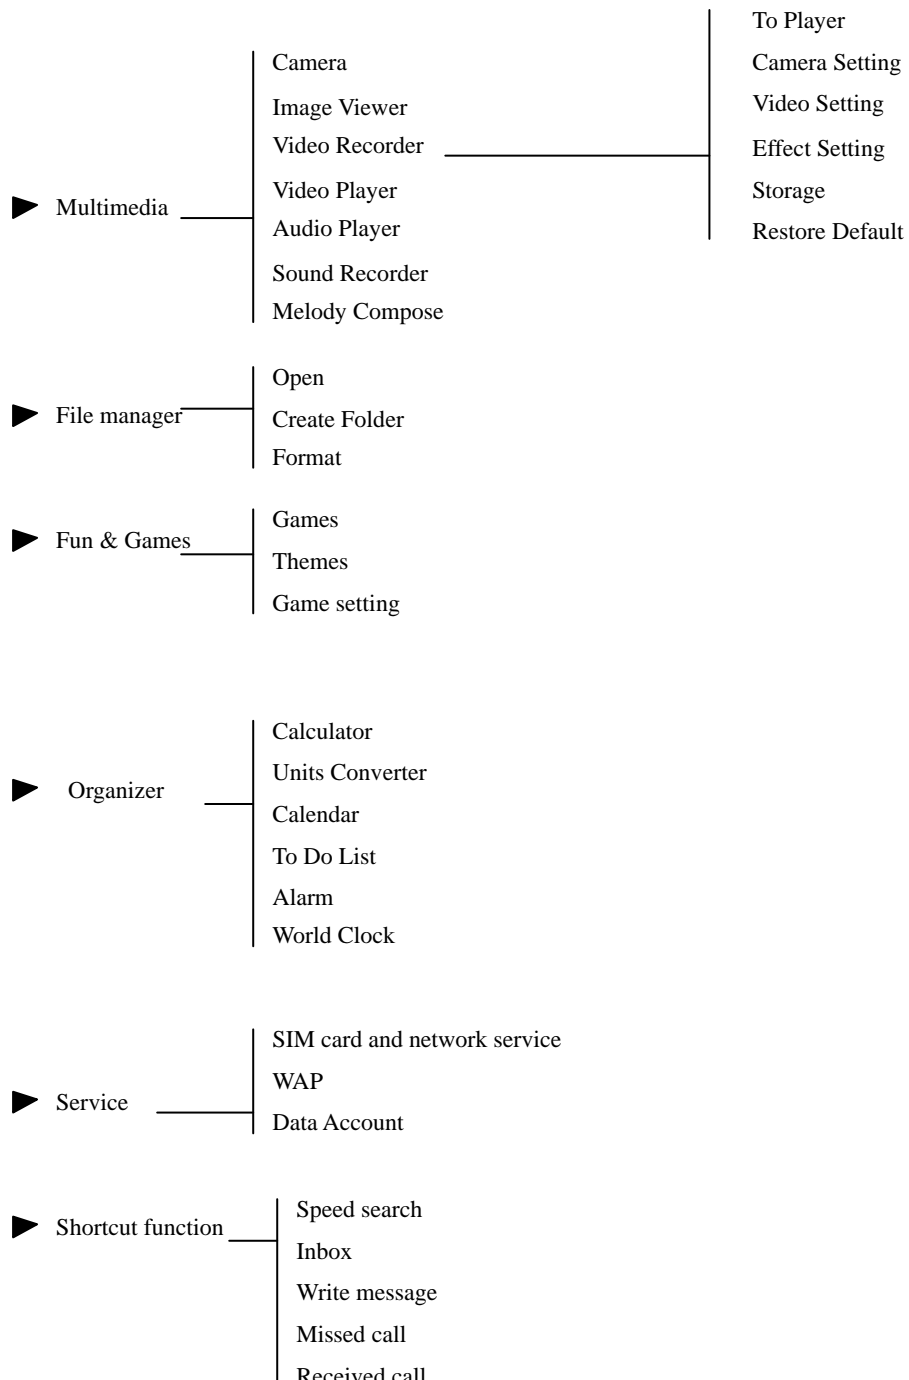

Memo  
Calculator  
Call divert  
Profiles mode

## 6. Use Guide

### 6.1 Install SIM card

Always switch the device off, and disconnect the charge

- Before removing the battery
- To release the SIM card holders slides it backwards, and lift it.
- Insert SIM card into its fixed base, down move metal chip to fix SIM card. Keeps the golden touch point of SIM card facing down and its missing corner fits the card's base.

### 6.2 Remove SIM card

First switch off phone power

- Remove battery
- Push the metal chip upward and push out SIM card and get it out off the slot.
- Install battery

**Remark:** SIM card store your phone numbers, PIN, PIN2 PUK, PUK2 IMSI, internet message, phone directory, SMS, DATA.

So please carefully operate SIM card, friction or bending lead to setting data which store in the SIM card and phone.

### 6.3 Install battery

1. Put the battery on the back of mobile, label facing up and connectors facing right.
2. Keep well battery cover and slip to the exact position. And push the cover smoothly from the end of mobile to its locking point.

### 6.4 Remove battery

1. Press "End" button and mobile will be turned off.
2. Push out the battery cover from its back part and increase a little and fetch down battery from mobile.

### 6.5 Charge the battery

1. Connect the charge to the wall socket.
2. Connect the lead from the charger to the charger connector in the phone.
3. The battery is completely discharged, pull out the plug, and also pull out the charger connector from the socket.

#### NOTE:

1. Switch on the phone, end charging the battery, screen will show quiet battery symbol.
2. During charging battery, phone still can use, but you need to delay the charging battery time
3. If the battery is completely discharged, it may take a few minutes before the charging indicator appears on the display.

#### Remark:

1. End charging battery, if charger connector still plug in the phone, the phone will automatic

check battery state, if check the battery charge is not fully, the phone will automatic charge again.

2. If the battery is short of electricity, the phone will shut off.
3. Not to install battery, not to charge the battery.
4. Not leaving the battery in hot place, do not dispose of batteries in a fire.
5. Not to take apart or refit battery.
6. Accidental short-circuiting can occur when a metallic object such as coin, clip or pen strips on the battery.
7. Use the battery only for its intended purpose. Never use any charger or battery that is damaged.
8. If the electrolyte leak on the skin or clothes, you should clear with soap and water. If the electrolyte splashes your eye, you should be completing wash and contact hospital remedy.
9. Not leaving the battery in cold places, will reduce the capacity and lifetime of the battery.
10. Throw away the old waste battery by the law. Such as battery recycle, not to throw away the battery as rubbish.

## **6.6 Power on/ off**

Press and hold the power key as shown

- Switch the phone on, press and key about 3 seconds, until you hear signal volume of the power open after switch the phone on, phone will search system.
- Switch the phone off, press and key 3 seconds.
- Until you hear signal volume of the power close.

If the phone asks for a PIN code, and select ok, if the phone asks for the lock code, enter the lock code and select ok.

After switch the phone off, if the phone asks for a PIN code and select ok. New card internet merchant supply. In put three wrong codes. SIM card will automatic lock. If want to unlock, please reference security password.

If entry phone password , please entry unlock code , then select ok function key .

## **6.7 install flash memory card**

Which suit for your phone . You need to care fully check before installing .

- Face the mobile upside , open TF leather cover from its left side . Insert TF card into the slot with its metal side facing up and close the leather cover . (For turning off)

## **7. Make a call / answer a call**

### **7.1 Make a call**

**7.1.1** For dialing , please input city code and phone number when the screen is standing by .

- 1.If entry the wrong number , press right function key , delete the last number . If delete all number , press right function key , until all numbers are deleted .

2.To call the number , press the call key .

3.To end the call , or to cancel the all attempt , press the end key .

### 7.1.2 Phone directory store numbers , speed dialing call

1. Use the speed dialing key , directly press below direction key enter phone directory , input the first letter of the name and press direction key search dialing number .

2.Then press the call key .

### 7.1.3 Speed dialing number in call register

1.Inthe standby mode , press left function key select " call register "

- Missed call : show recent missed call
- Received call : show recent received call
- Dialed call : show recent dialed call

2.Use up/below direction key move cursor to estimated dialed name number or phone directory .

3. Press call key dial call number

## 7.2 SOS call

Only in GSM system , you can use SOS call .

- Input SOS number . ex : 112
- Press call key

**Remark** : As internet or wireless transmit condition with any other mobile phone , perhaps it not support mobile phone special feature which some internet not support 112 call service . To specific important communication (hospital accident) , you should not completely rely on mobile phone . You should consult and check with the local merchant .

## 7.3 Dialing international call

- Long time pres number "0" , until show "+"symbol . Then you can dialing inter

national number .

- Input country number , area number , telephone number .
- Press call key and dial

#### **7.4 Answer call**

- Press call key or left function key select answering
- Call , Press end key end calling .

**Remark :** If you answer call , you not need to open calling divert and forbid incoming in calling limit .

#### **7.5 Adjust volume**

Calling mode , you can press side keypad adjust volume .

#### **7.6 Calling option**

When calling , press “option ” key enter calling option which have fellow function menu : pause , end , new calling , phone directory , message , record , static volume/recover/double volume

- Pause : pause calling]
- End : end calling
- New call : You can call another in calling , network support calling keep function . Press option key select new call , entry your dialing number , press call key , dial the second number .
- Phone directory : Search contacts
- Message : entry message menu
- Record : Record the calling
- Static volume/recover : static volume ok/recover static volume
- Double volume many channels : select open/close double many channels function

#### **7.7 Release call**

In calling , want to release call , directly press “release ” key , then press the key turn to normal call , also call with earpiece .

## 7.8 Missed call

Missed call will view the screen for some reason . About the missed called calls select menu>log-recent calls>missed calls or press call key and dial call .

## 8. Phone Book

### 8.1 Brose phone Book

1.Quick search : In standby mode , press left function, select **phone book**, press left function key , select **quick search**, fill the fields you want and select done, press below direction key and find your saved number .

#### 2. Search Entry

In standby code , press left function key, select **phone book**, press below direction key, select **search entry**, input searching number, press left function key, select you saved number .

### 8.2 Add New Entry

To add a new entry , select **add new entry** . Fill in the fields you want and select done .

To edit a entry , scroll to it and select **edit** .

You can save and manage entry information , such as name phone numbers and address , company name , e-mail box , fax no. , ringing tone , thumbnail image , movie connection , caller groups , as so on message .

- SIM card capacity set according you card .

### 8.3 Copy All

To copy names and numbers from a SIM card to you phone ,select option> **from SIM** . Scroll to the name you want to copy or mark the desired names and select options>copy to contact .

To copy a phone , fax or pager number form contacts to your SIM card , scroll to contact you want

to copy and select options>**from phone** to SIM directory .

#### 8.4 Delete

In standby mode , Press left function key entry main menu “**phone book**” ,press direction key select “**Delete**” ,select delete content form the SIM card ,phone or one by one delete ,select delete mode and press on function , them press delete key .

- Delete all message in the phone directory once .
- Delete all message in the phone directory once .
- Delete number in the phone and SIM card on bye one .

Remarks : when canceling mode is confirmed , password must be input for entrance .

#### 8.5 Caller group

1.Add new number for local phone . Select different groups . Incoming groups are including friends , family person , important person , business and others.

2. You can setup ringing volume, picture to each group caller. Then you distinguish caller group according your setting mode.

3. You can edit to each caller group, such as film connection, choose friends, press left function key select “ok”. You can look group name list, including group name, incoming ringing, film connection by yourself, scroll left/ right direction key selection. Group’s number may look or add.

- Only setup incoming groups numbers accord to incoming number, then your setting is effect. If local number shows area number, then caller groups in setting number need include area number.
- Only the number is effect which save in the phone directory.

#### 8.6 Extra number

- Local phone number: setting number, also editing, deleting
- Emergency call: Setting five group emergency call numbers save in phone for your reference. For example: 110,112 and so on. (Network service.)

#### 8.7 Settings

1. Capacity check: you can look the saved state in SIM card and phone directory.

‘for example: show SIM card 10/40 stand for 40 sets phone saved capacity, 10 had saved, 30 sets space can save according your SIM card capacity. For example phone 50/300 refer to phone store capacity, saved 50 sets, other 250 sets space can save.

2. Save position: choose new number store in SIM card or phone directory.

3. Name setting: When you add new call for your phone, option may set by yourself, including select logo family phone, company name, e-mail box, company phone, fax number, big image,

movie connection, ringing, and caller group.

4. Phone directory enroll: The phone can automatically play phone name and number. You can turn on the function.

## 9. Messages

The function support letter messages service, so that you can receive or send letter message. When the screen shows message icon, it seems that you have a new message. If your inbox is full, you can't receive new messages. Please delete full messages and continue to receive new messages. Please delete full messages and continue to receive new messages.

### 9.1 Write message

#### 9.1.1 Edit new message

This function is for

- Press left key, screen displays writing message window. Press left key, edit new message, enter below
- Menu: finish, everyday phrase, insert content, letter form, input way.

Press “#” key may change input way when edit message, if you input wrong letter, press delete

key . You can input symbol and picture and ringing in editing.

**9.1.2** Press left function key “option” in edit, the text as follows:

1. Finish: finish message edit
2. Everyday expression, select everyday expression, store in the phone. Press “ok”.
3. Insert content: select picture, my picture, cartoon, ringing tune estimated setting.
  - Picture, cartoon, estimated tune save in phone, press left function key select insert, press ok.
  - My picture, my cartoon, ringing, my ringing is empty at first. You need save the relative text in the phone, select insert, otherwise no text can select.
4. Letter form: select letter size, letter form, symmetry, and paragraph.
 

Letter font includes coarse letter, diagonal letter, bottom line, delete line.

Symmetry mode: automatic symmetry, to left symmetry, middle symmetry, to right symmetry.

Paragraph mode: automatic symmetry, to left symmetry, middle symmetry, to right symmetry.
5. Input mode: Select all kinds input method.

**9.1.3** After edit message, press left function key select “ok”, entry sending option can be on below operation.

1. Sending : Directly send editing message which send to one person , input number or search phone directory number send , at last, press left function key send.
2. Save and send: Message send to named people and save in inbox.
3. Save: Message send to named people and save in inbox.
4. Sending many people: Send message to people, at most 10 people, Input sending number first, edit message send it.
5. Groups sending: Message can send all of people any group in the phone directory, select sending group and press left function key send message.

Write message

## 9.2 Inbox

That function used for reading the received messages and it's proceed to reply, delete, edit,

forward, and format and use number, save objects etc. If it has no message or this machines did not break through the message function, press to hold after reading the information, the act hints” have no message”.

- Press certain function key. The screen shows the messages in order by the received order.
- Press above or under key to choose the messages that wanted to read. Press left function key to read messages, and press left function key to proceeds to reply, delete, edit, forward, format, use number, store item etc. operation.
- Press up and down direction key to read next contents, if the contents can't show inside one screen while you read the messages.
- Reply

That function used for reply for the person who sent messages.

- Press certain function key enter the function. The screen manifests edit messages.
- Press left function key to choose “completes” after editing new messages presses certain function key to confirm the “replies”.
- Delete

That function used for the deletion of selected messages.

Press certain function key, and the screen offer hint “delete”, then select yesto delete.

- Edit

The function used for reedit the received messages.

Press certain function key into the function. The screen will manifest message contents. You can edit the message at this time. The operation is similar with “write messages”.

- Forward

The function used for forward received messages the other.

Press certain function key into the function. The screen manifests message contents information press “options” choose “complete” enters to deliver main course, presses certain key enter after choosing sending way. Input the number or check number in telephone book, then press certain function key to send out.

- Format

That function used for the deletion of all messages inside the inbox.

Press certain function key, and the screen gives hint “delete”, then select “yes” to delete.

- Use number

If there is telephone number is sending out or received messages, that function can use the telephone number in the information, and at the same time deposit to the SIM card or phone book.

Press certain function key into the function. The screen manifests number list(use the number in the messages automatically), then press options key into the next menu, including: dial number, store.

\* Choose “dial number” can dial the use number directly.

\* Choose “store”, the screen give hint the conserve to the card of SIM  store to this machine.

Input the mane after selecting the store place.

- Store item

Store the received pictures of EMS or bell rings, then you saved in my pictures and my bell rings.

### 9.3 Outbox

The function send, edit, delete, delete all, edit number to save message.

- Press confirmed function key enter, the screen show saved message.
- Press left function key read specific text to select message
- Press “**option**” the function key send, edit, delete, delete all, edit number to selection message.

### 9.4 Everyday expression

In order to conveniently edit message, the phone supply many everyday expressions.

- Press left function key. Screen show some everyday expressions.
- Press “**option**” key save or delete to the expressions.

### 9.5 Message setting

The function is setting message all kinds parameter.

#### 9.5.1 Mode setting

1) Many modes for your reference, press confirmed function key select option. Each mode can edit, press up/down direction key, select menu, press left/right direction setting parameter. After finishing, press right function key and save setting result.

2) First set “folder name”

1. Message center

The function save message center number, please consult network message can send after setting.

Validity period of Message:

Message can't send by message center for some reason (switch off phone)

2. The function message time limited by the message center until overpass time.

Press direction key enter the function, screen show below save time limit

- An hour
- 12 hours
- One day
- One week
- Maximum

Press left/right key select saving time.

3. Sending form

Press direction key select enter, letter, fax, notify somebody of a phone and so on forms for four selections.

#### 9.5.2 Mode setting

Setting news report and reply path.

#### 9.5.3 Capacity search

Inbox and out box capacity space decide by the phone SIM capacity. Press the function key show space inbox.

#### 9.5.4 Message sending setting

Many options, according your phone SIM card relative network service, advice you set GSM first.

### 9.6 MMS

This service must be applied to operator.

### 9.6.1 Write Message

During message writing, you can select receiver, copy, Create file copy, mail topic, and content edition

- Receiver :can be mobile number or e-mail address
- Copy :copy this MMS to other people, can be mobile number or e-mail address
- Create file copy: send MMS to other people by secret way, and these people can't see the receiver for the file, can be mobile number or e-mail address
- Mail topic can be edited
- Content edition includes words input, pictures insertion, voice and attachment.

### 9.6.2 Inbox

Store the MMS into inbox.

Enter inbox and received messages will be displayed, among which the new message will be marked with unread mark on its left side, MMS list can be checked with up/down key or side key by rolling and display sender number or name at the same time. If you check MMS, its status will become read with "READ" mark. In MMS list, press left soft key "select" to reach below operations:

- Read the MMS
- Message details: check the specific information including sender, copy, main topic, date and message size etc.
- Answer: answer message to sender.
- Answer to all people: sender and all other receiver in copy.
- Forward: forward the message to other people.
- Delete: delete the message.
- Delete all: delete all MMS in inbox.
- Number usage: pick out pointed phone number and store it into SIM card or mobile phone for usage; direct dialing can be ok.

### 9.6.3 Outbox

Enter outbox, press "options" key, below options can be checked.

- Check: read and check this MMS.
- Message details: read the special content of the message including sender, copy, main topic, date, and message size.
- Send: send this message to other people or address.
- Delete: delete this MMS.
- Delete all: delete all MMS in outbox.
- Number usage: pick out pointed phone number and store it into SIM card or mobile phone for usage; direct dialing can be ok.

### 9.6.4 Draft:

Enter draft, press "options" key, below options can be checked.

- Check: read and check this MMS.
- Message details: read the special content of the message including sender, copy, mail topic, date and message size
- Send: send this message to other people or address.
- Message edition: enter the edition screen for draft. Refer to message writing

- Delete: delete this message.
- Delete all: delete all MMS in draft box.
- Number usage: pick out pointed phone number and store it into SIM card or mobile phone for usage; direct dialing can be ok.

#### **9.6.5 Message setting**

2 daily short message are stored in the mobile, user can check and read the details and produce a new message form them.

#### **9.6.6 Message setting**

- During stand by status, press enter to “MMS” and select “**message setting**”. You can operate as below:
- Sending setting: you can set expire time, sending status, read status, previous right, separation time, sending time etc.
- Receiving setting: you can set main network, floating network, read report sending, sending report permission.
- Fitters: you can set unmarked sender, max receiving capacity, advertising message etc.
- Setting grade edition: you can select between activation setting and edition mode.
- Memory status: you can check memory usage rate, used and available capacity.

#### **9.7 Voice inbox**

Voice inbox need SIM card support and network merchant open, hind options as below.

Edit: Can edit two voice mail number

Delete: Delete setting voice mail message.

Connection to voice: If user applies the function, then users can hear leaving message voce inbox.

User must apply voice service, until use the function.

#### **9.8 Broadcast message**

You may be able to receive messages on various topics, such as weather or traffic conditions from your service provider. (Network service) For available topics and relevant topic numbers, contact your service provider. To turn on the service see cell broadcast setting in “cell broadcasts setting.” select menu message options cell broadcast the message list, you can see the status of the topic, the topic number, topic name, and whether it as been flagged for follow up. A packet data connection may prevent cell broadcast reception.

- Meet busy divert

The setting of the function will divert incoming call into appointed call when the phone is busy.

- Divert all data incoming

The setting of the function will divert all data incoming when the phone is busy.

- Cancel divert

Cancel all incoming.

- Press left function key confirmed, screen show diverting function close, and then return.

### **10 Call Histories**

That function automatic record dialed recently, missed or not missed telephone number, and precedes every kind of operation to these numbers.

#### **10.1 Missed calls**

That function will record automatically to the telephone number that did not hear recently and

refused to hear, and can look into the detailed contents of these numbers. (Date, time, name, or number and number of times)

- Press left function key into that function. The telephone number will be manifested in proper order that cannot receive.
- Press the top or under key to choose the telephone number.
- The pressing left function key can look into the detail of the selection telephone number presses left function key (options), can proceed the deletion, keep, dialed number and edit etc. operation.

### **10.2 Dialed calls**

That function will automatically record the recently telephone number that dialed, and can proceed the operation of deletion, keep, dial number and edit etc.

The operation is similar with the missed call.

### **10.3 Received calls**

That function will record automatically the received call, and proceed to the operation of deletion, keep, SMS, dial number and edit etc. to these numbers.

The operation is similar with the missed call.

### **10.4 Delete call log**

That function used for the deletion of missed “have dialed” received telephone record.

- Press left function key into that function, press top/under key choose to delete the item. The screen inquires “delete” , “or” deny
- Press the left function key to certain deletion, return after carrying out.
- Operation of one-time cancelling of all communication record is possible.

### **10.5 Call Time**

- The last converse time: Manifestation converse time of the last time.
- Have dialed telephone grand total: The manifestation is all converse time of the dialed call.
- Have received phone total: The manifestation is all converse time of received call.
- All account return the zero: all converse account establish to zero.

### **10.6 Call costs**

- Last time converse expenses: Look into converse expenses of recent time.
- All converse expenses: Look into all converse expenses.
- The converse expenses returns to zero: Clearance all converse expenses information, instauration zero appearance. (input the PIN2 code)
- Expenses restrict: Press the establish function key to enter, inputting the code of PIN2 to establish total converse expenses after being certain
- Price and fee rate: Press the establish function key to enter, inputting the code of PIN2 to establish behind price and fee rate after being certain

\* That function needs the network support.

### **10.7 SMS counter**

Look into the quantity of the have sent out or have received information.

### **10.8 GPRS counter**

It could be used to look into the deliver/ accept discharge information number by the phone using GPRS on the line.

## 11 Settings

### 11.1 User profiles

This function used for establishing the cellular phone under the different environment to hint telephone in different ways, press top or bottom keys to choose that options, then press left function key enter.

#### 1. General

The tacit establishes of general: the tacit mode of phone while it's out of factory is general mode, and also can customize, including:

1) **Tone setup:** (waiting appearance, can press the right faces key enter to establish quickly):

**Incoming Call:** press left function key into the function.

- Press the top or under face key to choose the bell ring, the phone will broadcast homologous bell ring.
- Press left function key to certain choice.

**Alarm:** The voice of the alarm, operation method is similar with the "telephone" bell ring establishes.

**Power On:** The hour of machine that open the voice broadcasts, pressing left function key into that function.

- Press left function key to certain choice.

**Power Off:** the operation method of shutting down is similar with "open the machine" of the bell ring establishes.

**Message Tone:** It is hint information when received information or batteries electricity measures not enough, the establish method is similar with the last.

**Keypad Tone:** It is a voice when point the key sent out, press left function key into that function.

- Press the top or under face key to choose, press left function key to certain choice. Choosing the empress presses right function key to return.

2) **Volume:** Can establish the bell volume/ the key volume.

3) **Alert Type:** To choose to hint the telephone's way.

4) **Ring type:** it is an orotund way while ringing.

5) **Extra Tone:** It's to point whether open: the warning, error, Camp on, Connect volume.

6) **Answer mode:** It's to point whether need to press arbitrarily key to hear the telephone while being calling

7) **LCD backlight:** Establish LCD shining time that rises on LCD's back.

After you completed establishes, then pick out to open, that environment specifies namely for the environment mode that front use.

#### 2. Meeting

The modification of the meeting mode recognizes tacitly is similar with the method of establishing last time: General mode.

#### 3. Outdoor

The modification of the outdoor mode recognizes tacitly is similar with the method of establishing last time: General mode.

#### 4. Indoors

The modification of the indoors mode recognizes tacitly is similar with the method of establishing

last time: General mode.

#### 5. Headset

The headset mode does not need to establish specially, as long as put on headphones, it can automatic conversion.

### 11.2 Phone setup

**Phone setup** can establish function as follows: “**time and date**”, “**schedule power on/ off**”, “**language**”, “**preferred input methods**”, “**display characteristic**”, “**greeting text**”, “**speed dial**”, etc.

1. **Time and date**: set the city, time and date, and the show format of the time.

- Set city: Pressing top and bottom direction key can establish whereabouts city.
- Set time/date: establish time at the last column, input the day at the next column. It can also choose whether open hour of summer season or not.
- Set Format: its setting is 12 of 24hours; there are different modes for option below: y-m-d, m-d-y, d-m-y, m-d-y, y-m-d.

2. **Schedule power on/ off**: there are four sets timing function, establishing the open and shut down the phone automatically. You must open the phone function if you want to use the timing open and shut down function. Then establishes the open or shut down phone’s options, finally establishes time.

3. **Language**: options to display words including English and simple Chinese.

4. **Preferred input methods**: this is tacit edit method while editing the text. You can choose what you like.

5. **Display characteristic**: the screen manifest the wall paper while the phone is waiting, and can also choose whether to show date, time and this machine numbers or not.

Wall paper: There have several pictures provided as choice.

It can also enter to down load and select what you download in the file document from the computer.

- Screen protection: Establishes the screen protection function.

Establish the protection appearance for “open” first, then establishes the time that screen’s protection, choose an appearance for the screen protection finally.

- Opening flash: Open the animation portrait of the hour of machine.

Establish choice.

- Manifest date time: Establish for open, show the date and time on the waiting phone’s screen.
- Show this machine number on the machine appearance, the prior condition is that have established the name of this phone number is telephone in telephone options of “this phone number”.

6. **Greeting text**: It refers to display compliment language when you switch on the phone. You can set the state is open, edit favorable language by yourself.

7. **Speed dial**: You can set many speed dial number in list, the state set open. After setting, dial setting number only press key pad 3 seconds, the number will automatically speed dial.

### 11.3 Call setup

To make and answer call

Waiting press left key select setting call setting select menu press up-down direction key

### **11.3 .1 Caller ID**

Select system setting, hide number, send number, need network support. The caller ID will display on the opposite mobile when dialing. (Setting hide number, phone only can answer not to call)

### **11.3 .2 Call waiting (network service)**

During a call, to answer to the waiting wall, press the call key. The first call put on hold. To end to the active call, press the end key. To activate the call waiting function, select menu tool-setting call-activate.

To switch between the two calls select swap.

### **11.3 .3 Call divert**

Transfer to connect a call on hold to all active call and disconnect by yourself.

For availability contact you network operator service provider.

- Divert All Voice Calls.
- Divert If Unreachable
- Divert If No Answer
- Divert If Busy
- Divert All Data Calls
- Cancel All Divert.

### **11.3 .4 Call Barring**

Setting call barring call receives or dials in any conditions. First you must apply to the network merchant open and gain network limited password, until you can set call limit all function, each item of call limit can set open, close, search, the text of the call limit include:

#### **1. Outgoing Calls**

All calls: Barring all call dial.

International calls: Barring dial international long distance call.

International except home: When mobile are roaming only limited dial any number which register in network Supplier County.

- Activate: That function used for starting restrict dialed number. Press certain function key into the function. The screen hints to input the prohibition against password.

Press certain function key after inputting the password. The screen will manifest to return after carrying out the circumstance.

- Deactivate: That function used for the close limits to dial. Press certain function key into the function. The screen hints to input the prohibition against password. Press certain key after inputting the password. The screen will manifest to return after carrying about the circumstance.
- Query Status: That function used for the manifestation of limited dial number's establish circumstances. Press certain function key into the function. The screen will manifest to return after carrying out the circumstance.

#### **2. Incoming Calls**

Barring incoming calls includes all calls and travel extensively calls. The user will suffer restrict of the network supplier after opening, but do not receive any call.

The operation is similar with "Barring Outgoing Calls".

### 3. Cancel All

Those functions used for cancel all call restrict.

Press certain used for the modification of the limits password.

### 4. Change Barring PW

This function used for the modification of the barring password.

- Press certain function key into the function. The screen hints to input the old password.
- Press certain function key after inputting new password, then the screen manifest input the new password confirmation again.

**Notes:** When you apply network function, you can gain password form the network merchant.

### 11.3.5 Line Switching

The function is used for Line Switching. Press left function key may select Line 1 or Line 2, (network service) advice you choose Line 1

### 11.3.6 Call Time Reminder

The function is setting call time reminder and hint way .

- Off: Without time hint in call.
- Single: Can set 1-3000 seconds time, each setting time will hint once
- Periodic: Can set 30-60 seconds, time setting time will hint once.

### 11.3.7 Call Time Display

The function is to view the Call time display of your incoming and outgoing call.

Press left function key is selecting.

### 11.3.8 Auto Redial

The function key setting automatically redial when the phone meet busy or don't pass through the phone.

Press left function key is selecting.

### 11.4 Network setup

1. Network Selection: you can set automatically or artificially select network, as select automatically network, need select the same network with the network merchant, until you can use.

2. Preferred Networks: Select prior network merchant, show SIM card network in silence state, press option operate below.

From the list add; show all PLMN List, total have many options.

- Add :add network and use prior authority
- Delete: delete local prior network

3. Band Selection: select frequency 900/1800MHz and double frequency according to local network merchant.

4. GPRS connection: need phone select eternal connection, screen have corresponding icon. (press left function key transfer)

GPRS need open to local network merchant.

Detail operation as attached disk.

### 11.5 Security setup

Security setup refers to add password to phone some function. It is helpful to you prevent your mobile and SIM card were peculated. Entry right password, then press confirmed key. If you input

wrong number, first press 'clear' delete wrong number and input right number. You can modify the security setting for the PIN code, PIN 2, and lock code.

- SIM lock

The function can lock/unlock SIM card operation for mobile, input SIM card password as operation. Input PIN code, set SIM card lock or unlock, SIM card is close in defaulted state.

When SIM lock, switch on phone, ask you input SIM card password, PIN code. PIN supply by SIM card merchant; if you input wrong code three times, you need input PUK code, which unlock modify lock PIN code. If PUK code can't supply or lost, you need contact network merchant.

- Phone lock

The function can lock/ unlock phone operation, you need input mobile phone password as operation.

As mobile phone lock, ask input password when switch on mobile call password.

The mobile phone passwords are 4 to 8 digits, defaulted password for 1122.

- Auto keypad Lock: The functions lock/unlock operation. Setting keypad time: 5 seconds, 30seconds, 60 seconds, 5 minutes, press lock defaulted state is close.

As mobile phone lock, keyboard lock in standby mode reach setting time, press right function key and press # key unlocks.

- Fixed Dial

If you SIM card have this function, you can limit to dial outwardly.

If starting the function, your telephone can only call the urgent telephone number. Establishing this item's function demands to input the code of PIN2.

- Barred Dial

This function is according to the SIM card.

- Change Password

Marking use of that function can change PIN, PIN2 and the phone password.

Operation step: Change the password input the original code input the new password input again to confirm the new password.

### **11.6 Restore Factory settings**

This function used for setting instauration as the defaulted value when the phone out of factory. Press top and bottom direction key to choose "recover factory setting" options, then press left function key, the screen show "input the password", input the right password key according to the request. (The factory password 1122)

### **11.7 Sound Effect**

Adjust orotund result for broadcasting. The audio frequency balanced machine canned chooses has: Have no variety, heavy bass, and dance music, classicality, and party, pop music, rock music.

## **12. Multimedia**

Usage elucidation:

This machine tool has the function of MP3, also as "the electronics mobile hard-dish" usage (shut down appearance), the operation method is similar with the dish of U, use U dish function requests the user has the necessary computer operation common sense, computer operate system should be : windows 2000 or windows XP. If on the windows 98 operate system need to be install the machine software.

Part of operation need computer knowledge, if you meet any difficult in operation, please call our company and gain technical support.

Usage as follow:

Download MP3 song or phone film to your phone, first power off ,use the phone-attached special USB data circuit interface insert computer, the other port insert the phone charge/ data interface ,computer display “found new disk” for move disk MP3 ,form voce file or 3gp, MP4 video file copy to move disk. After finish copy, security delete hardware, wait computer display “pulling out USB facility”. Power on the phone and listen to music.

Insert mini SD card, please power off the phone.

According the above way, the phone also can act as U disk, usage way the same as U disk.

### 12.1 Camera

In standby mode, press left function key press left/ right direction key, select multimedia entry camera, and the screen display cartoon state press left right direction key adjust luminance. Select press save key save picture, press right function key cancel save, return preview state.

Press option key can go on below operation in preview state.

- Arrive photo album: Enter the photo album of telephone looking into the screened photo graph
- Camera enactment: Can establish: “the white equilibrium, shutter voice, expose expiation, the night screen mode and avoid the flicker” function
- Photograph enactment: Can establish at size and photograph qualities that take photo the photographs.
- Special effect enactment: Establish different effect, and choose according to oneself need.
- Frame: Choose different frames.
- The connected taking photos enactment: Yu can choose to establish connected taking function and the ways according to you demand.
- Delay to take: You can choose to establish delayed taking function and the delayed time.
- Saving path: Choose the path of saving position for screen data.
- Restore enactment: All of the above recover to factory set up the appearance.

### 12.2 Image Viewer

Look over the screened photograph. Now enter into the options if there is photograph, pressing left function key to proceed to operations as below:

- Look over: Enlarge to see the photograph. Press top and bottom direction key to view all photo graph.
- Preview: You can choose the way to preview many pieces’ photographs.

Send: deliver the photograph “to the wallpaper” to screen protection “to the open flash” to shut down flash “to phonebook” to EMS”

### 12.3 Video Recorder

In standby mode, press left function, press up/down direction key, selection multimedia, select Video Recorder, entry press camera key begin to video, finish video automatically save press right function key and stop.

In make scenery state, press left key entry option, operation as follow:

- To player, turn to cartoon play, you can look recorded cartoon data.
- Record device setting: you can set many options according to setting requirement

- Film setting: press left/ right direction key choose, up-down direction key change, user can set according to setting requirement by himself.
- Effect setting: you can select all kinds record special effect.
- Save path: select record data save position (advise setting flash memory card)
- Restoring setting: select option setting restore incipient state.

#### 12.4 Video Player

After entering the options, if there are appropriate flash documents, they will be showed, and press top and bottom direction key choose flash documents, pressing left function key can proceed below operate:

- Broadcast: Broadcast the documents. Press left function key to broadcast, press left function key to pause, the right function key to stop, and press top and bottom direction key to change broadcast time that see the video frequency. No sound while times broadcast. While broadcasting press “\*” key could turn to full screen appearance. Press right function key to return after broadcast over.
- Change name: change the name of video frequency.
- Deletion: delete the document.
- Delete all files: delete all flash video frequency documents.
- Compositor: put all flash video frequency documents.
- Compositor: put all video frequency into line. You can choose the rule of lining up.
- Saving path: The flash video frequency’s tacit saving path.

The movie player can broadcast the format of “.3gp” or MP4 documents, the customer can search the type’s document to download on the internet by himself, or download homologous “document format conversion software” change all of your video documents into the supporting “MLP3” or MP4 documents. Make the phone have the function of broadcasting movie; while the document of cowgirl downloads to the phone, if capacity not enough; customer can enlarge the capacity of the flash card (T-Flash) by himself.

#### 12.5 Audio player

The key that the audio player displayed and the keyboard should operate its function.

In a state of await, press left function key press the left or right key to choose “multimedia” choose “Audio player” enter: (or await press above key choosing enter directly)

Basic elucidation in key:

- Above direction key: Broadcast/ pause key, broadcast or pause to music.
- Below direction key: Stop the key, stop broadcasting.
- \*Key: Last a song.
- #Key: Next song.

Press left function key enter detailed list, you can see your music list while you broadcasting music. Operation each song as follows:

- Play: Broadcast the current song.
- Detail: Look into the detailed information in current song.
- Add To Rings: Make the current music join in the bell rings to provide usage.
- Refresh list: renovate the detailed list.
- Settings: Set up “audio document position (the flash card/mobile phone), automatic create

detailed list, external appearance, repetition (broadcast method), random, background broadcast balanced machine”.

### **12.6 Sound Recording**

Press left function key under the waiting appearance press the left/ right function key to choose the “multimedia” choose recording enter: Then you can look into the recording document if there has recording documents after entering. Pressing option key has functions as follows:

- Recording: record new recording document.
- Broadcast: Broadcast the recorded document.
- Additional: affiliation of new recording into recording document.
- Change name: change current document name.
- Deletion: strike off the current recording document.
- All deletions: strike off all of recording documents choose note.
- Left function key: Enter the options menu.
- Right function key: Delete the flash note in editor.
- Ending key: withdraw the edit window of melody composes.

### **12.7 Melody compose**

Compose music.

## **13. File management**

This mobile phone provided designed file management for the customer, and similar with computer mode. You can make this phone to manage stored documents if you could use the phone as electronic hard dish.

Press left function key into: The mobile phone, slap card. You can see all saving space after the “mobile phone” and the flash card entering among them.

Press options:

- Open: open the current mobile phone database.
- Create folder: set up a new folder according to demand.
- Format: format the current phone hard dish, all the contents is cleared (such as computer)

## **14. Fun & Games**

### **14.1 Games**

Options in the game:

- Break continuously: make the game continuous after pause last time and need not restart.
- New game: using these options can start the game.
- The best seniority: the best player ranking.
- Game elucidation: with the simple writing elucidation rule concerning game.

### **14.2 Themes**

You can choose the cellular phone manifestation background color according to the demand. (Preset, classic, popular three kinds of modes provides to choose)

### **14.3 Game setting**

You can choose whether opens function of the game sound effect, game vibrates, according to yourself loves while you play the game.

## **15. Organizer**

The phone is used as a kind of convenience, fast means of communication, having owned the large

customer now, and its function, increase the efficiency etc. the characteristic has made the cellular phone become the tool of people indispensability.

### 15.1 Calculator

Calculator: Pressing this functioning key can carry on add, reduce, multiply by, in addition to of operation, Making use of the method BE:

- The importation wants to compute of the first word; (press “#” key importation decimal point)
- The direction key represents respectively “+ - x ÷ M+ M- MR MC” function, pressing homologous direction keying screen will appear and operate of calculation function
- The importation wants to compute of the second word, if have a re-usable necessity these operation again.
- Press once the left function key, show a calculation result.
- If the importation is false, can press right function key to delete false of numeral or operation sign.

### 15.2 Unit converts

This function can concert parts of weights and length units in common use:

- Choose convert the unit after entering at the first column. Press left or the right direction key to switch;
- Press the below direction key to enter the next column (or the third column), inputting the unit number that to convert on the figure keyboard;
- Press left function key to show the convert result after certain.

### 15.3 Calendar

This function used for looking for some date’s appearance and its date of lunar calendars. Such as: it can look for 15 august is what day of the week and lunar calendar time.

Pressing direction key can move to look for.

Pressing left function key (options) can proceed operating as follows:

- Agenda: establish a certain route of travel arrangement hint that you need.(be similar with memo).
- Jump to date: input directly the date then it can jump to date that you want to see.
- Lunar calendar: Open or close the lunar calendar manifestation.

### 15.4 Memo

This function used for recording to do list, and establishing the bell of phone hints time.

- Press certain function key into that function. The screen shows total memo quantity, using the direction key to choose.
  - Press left function key can: view, join, edit, delete record or format etc. operations.
  - View: view memo contents that already established.
  - Add: add in new memo (press top and bottom direction key to move the item during established, press left and right direction key can choose the contents)
- 1) According to the screen hint, establish the year, the month, day one by one in order at the first line using the direction key.
  - 2) Establish hint start time and ends time in order at the second line.
  - 3) Input the easily forget contents in remarks.

- 4) Press left and right direction key to choose open in the alarm clock.
- 5) Press left and right direction key to choose the way of hint store after completed.
  - Edit: edit the modification to the memo that makes selection.
  - Delete: delete the selected memo.
  - Format: delete all memos that already established.
  - Deliver the calendar: send out the memo by the message and color message, and also can save the file.

### 15.5 Alarm

That function used for making the phone ring at the appointed time, if appointed time has arrived, then this function can also make the bell ring while the phone is in the state of shutting down, and hint whether open now.

1. Press alarm function into the function. (Setup 3 alarm clocks at most)
2. Press top or under key to choose alarm clock, press edit key to establish.
  - Press left and right direction key to make the alarm is open at the first line.
  - Input the wanted time in the second line.
  - Ring method: press the left/right key to choose the bell method, once, everyday, definition (need to establishes everyday of the week while select to choose define ring method according to need to be established if open or close, finally press complete key, then store the establishes.

\* presses top and under direction key to move the item, pressing left and right direction key can choose the contents during the establishing.

### 15.6. World Clock

Press the left or right to choose the time of the corresponding city after pressing left function key. You may want to call a friend in the other corner of world, but do not know how much native time is, this function can let you looking into the world time between each main city and region.

### 16. Service

This function needs the supports of SIM card that you use, and the different network carries have different menu in manifestation of contents, such as the world service user card of the Chinese mobile could “world service”.

### 17 Quick button functions

Quick button function: user can make setting of quick button according to his needs, During stand by status, through  $\Delta \nabla$  buttons can reach the function list set by quick button.

This function allows 10 quick modes: name search, inbox, SMS, missed call, received call, tones setting, alarm clock, ringing mode, call divert and status mode.

### 18. Input method

#### 18.1 Input key

Choose key:

- Figure 1-9: input figure, and alphabet.
- Left function key: certain key
- Direction key: the control of cursor moves.
- Figure key 0: input the blank space or figure 0.

- \*key: open the punctuation mark in input method.
- #key: choose the input mode in the blank appearance (stroke, spell, big/ small English alphabet, figure), and also can changes input mode in any input mode.
- End key: withdraw the input method.
- Right function key : clear the false word that inputs

### **18.1.1 English input**

Example: English word “how”, presses # key change to minuscule English input state.

Key pad sequence: number 4 (h), number 6 (o), number 9 (w) press confirmed key.

English word SRE, press # key change to capital letter English input state.

Key pad sequence: number 2 (A) number 7 (R) number 3 (E) press confirmed key.

### **18.1.2 Clear input words**

During spell words, press right function key can delete the last letter.

Exit spell state and entry spare state, press delete key delete one or more words, press \* key open punctuation symbol mode.

### **18.1.3 Insert character in input words**

User can find proper position input new English words in spare state, press left/right direction key.

### **18.1.4 Association mode**

after input parts words prior letter, screen display associate word initially with the letter, press up-down direction key find the require word in associate word, then press confirmed key select . if not right you can repeat step input word again.

## **19 Safe passwords**

The safe password can prevent illegal usage of the phone card of SIM, and here are explanation introduction. It is used to set inside the phone.

### **19.1 The code of PIN**

PIN code is individual identifies code, constituted 4-8 arithmetic figures, used for preventing the card of SIM drive illegal usage. The code of PIN is offered by net work camp company. If open the code of PIN, the phone need inputs that password while open the phone each time.

Remarks: If continuing to mistake PIN code by 3 times, the card of card of SIM is locked, then must input the PUK code in order to solute lock. (the network camp company generally did not provide the code of PUK for customer, therefore the screen request input the code of PUK, please contact with network comp company immediately, and do not input any word by yourself!!)

### **19.2 The code of PUK**

The PUK is the code of the individual solution being constituted by 8 arithmetic figures; used while the PIN code is changed.

Remarks: The password offered by the net work camp company.

### **19.3 The code of PIN2**

The code of PIN2 used for preventing into some high classes function. For example, fix to dial etc.

Remarks: If continue to mistake PIN2 code by 3 times, its operation step is similar with mistaking the PIN code, the difference is that should input the PUK2 code for solution lock this time.

### **19.4 The code of PUK2**

The PUK2 is the code of the individual solution, constituted by 8 arithmetic figures, used when the PIN2 code is change.

Remarks: This password supplied by net work camp company.

## **20 Maintenance and settle problem**

### **20.1 Care and maintenance**

Your device is a product for of superior design and craftsmanship and should be treated with care.

The suggestion below will help you protect your warranty coverage.

1. Keep the phone out of the reach of small children.
2. Keep the device dry. Water, humidity and types of liquids or moisture can contain minerals that will corrode electronic circuits.
3. Do not use or store the device in dusty, dirty areas.
4. Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and drop or melt certain plastics.
5. Do not store the device in cold areas. When the device returns to its normal temperature, moisture and form inside the device and damage electronic circuit boards.
6. Do not attempt to open the device other than as instructive in this guide
7. Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
8. Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the shell.
9. If any device is not working properly, take it to the nearest authorized service facility for service.
10. Please look for special repair man if there are some thing wrong with the phone and its components.

### **20.2 The maintenance of batteries**

1. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles. (Until the low electricity hint after 14 hours of charge battery each time), then charge battery is full in future.
2. The battery can be charged and discharged hundred of time. But it will eventually wear out. When the talk and standby times are noticeably shorter than normal, buy a new battery.
3. Unplug the charger from the electrical pug and the device when not in use. Do not leave connected to a charger over a week. Overcharging may shorten its lifetime.
4. Switch off the phone, automatically lost charge in order to prolong the battery lift. Do not try to use other way lost charge not licensed method.
5. When the level of the battery electricity is very low, only can keep few minutes call, the phone will produce sound to warn, the level of the battery wear out, the phone will automatically shut off.
6. The battery use age is not over one and a half years. Advise you change the battery. Pleases not throw away the waste battery and recycle according to the local law.

### **20.3 Help**

If the different state take place when you use the phone, please according to next form for solution:

If still you have question, please call the network merchant service consults.

Different state	Occur reason	Solution method
The bad signal receive	1. Receiving signal is bad, such as high floor surrounds or ground floors.	If in the indoor, please move to the window nearby. If the signal is very weak, please move to the open spaces place.
	2. Be in calling intensive period, the circuit obstruct and can't call.	Avoid as far as possible.
	3. Keeping far away from the net work merchant base stands.	Ask the network merchant provides the service district diagram.
Echo or cacophony	1.The network merchant's interior line is bad	1. Hang down and redial. 2. The choice the good circuit that may replace.
	2. The native circuit n some converse regions is bad.	
Not to power on the phone	The level of the battery wear out	Charge for the battery
Standby time become shorter	1. Waiting time has something to do with network camp the company's system establishing. Waiting time is different while the same phone under the different network usage.	Please shut down temporarily in the bad signal district.
	2. Battery loss, battery will lower gradually after using it several years.	Replace the new battery.
	3. The phone will last to blast-off, looking for the base stands while canning not accept the signal, consuming the battery of large quantity, resulting in to waiting time short.	Move to the good received district in signal or close temporarily.
The SIM card cannot be used.	1. SIM card damaged 2. SIM card is not good install 3. The card of SIM card set is not clear	1. Sending back to the net work camp company check. 2. It is right refresh to install the SIM card 3. Wipe the point using the clean cloth.
Have no net work service	1. The card of SIM is invalid 2. Not in service district 3. The signal is weak 4. Whether the customer circuit switch is right	1. Contact with the network merchant 2. Check net work carries camp the company's service district 3. Move to window outside or choice another service networks 4. Choose the right way line (try for "L1")
Can't send out the messages	Did not open this service or have not input the message center number	Contact with the network merchant: set up the message center number.

Can't dial or received call	Have established dial the number or the call restrict	Close the fix dial number or the call restrict This phone number establishes as "supposing establish"
The mistake of PIN	Input incorrect password of PIN 3 times	Contact with the network camp company
The battery can't refresh or refresh to have no manifestation	<ol style="list-style-type: none"> <li>1. Battery or charger damaged.</li> <li>2. Temperature of the phone is lower than 5°C, higher than 40°C.</li> <li>3. Bad contact</li> <li>4. Electricity of battery run down</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace new battery or chargers.</li> <li>2. Adjust to the refresh environment</li> <li>3. Check the charger contact whether link good</li> <li>4. The extension refreshes time, (have the manifestation while the battery electric voltage return to the CPU work electric voltage), or try to use the sit charge.</li> </ol>
Can't input the data into the <b>phone book</b>	The <b>phone book</b> data is already full.	Delete parts of telephone directories data
Can't establish some functions	The net work carries camp companies do not provide this function.	Contact with the network camp company.
Can't play the MP3	Whether have the download music of MP3 format	The exactitude downloads of the format of MP3 music to the phone

### Additional index one:

#### Term

GSM: Globe number honey comb move communication system

SIM: User identify card

SMS: Message business

PIN: Personal identity 2, usual refer to PIN 1 follow SIM card supply, use SIM card password.

PUK: personal Unlock code, follow SIM card supply, Ss you continues input wrong PIN code three times, SIM card lock , revise PIN code.

PIN2: Personal identity 2, network merchant supply, goes on special function, need SIM card support, fixed number dial FDN and so on.

PUK2: Personal lock 2, follow special SIM card supply.

IMEI: International move equipment identity by 15 digital forms. One phone has one corresponding IMI number.